

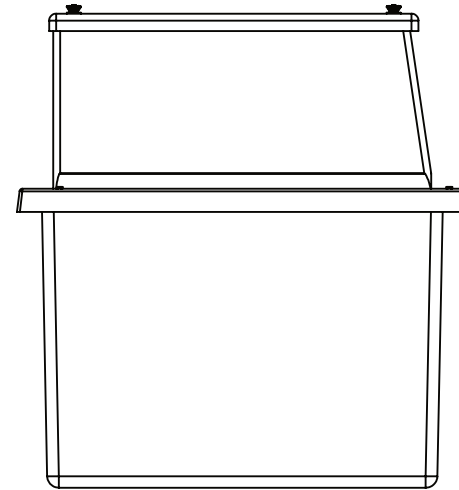



View 1

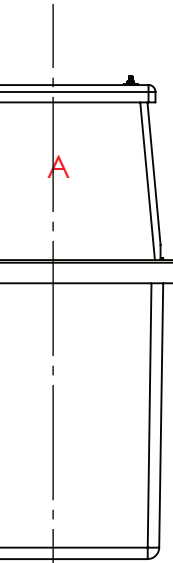

View 1

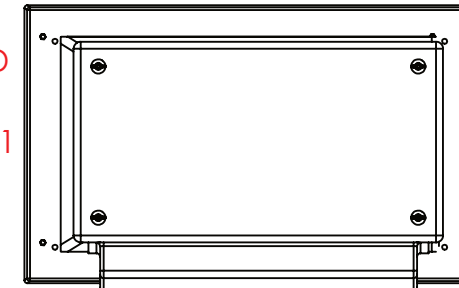


View 2

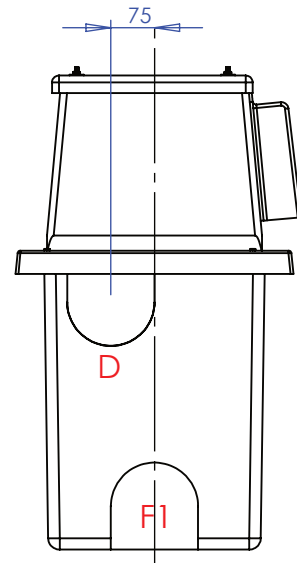


View 4

View 4



View 3

View 2

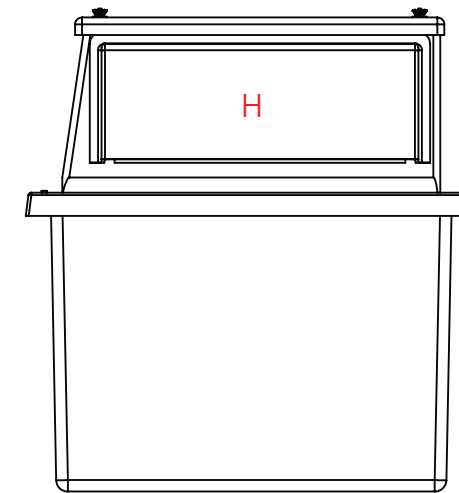

View 3

Connections:

- A - Inlet
- B - Lid vent
- D - Overflow 1 No pad T6
- F1 - Outlet 1 No pad T6
- H - Spillover 1 No screened SPO3 fitted to FVH.

Drawing Approval	
Date	
Name	
Signature	
<p>I am signing to approve this drawing to progress my order in the build program. I accept that I cannot cancel this order following my signature of approval.</p>	

RUBBED DOWN BY	PRINT NAME
----------------	------------

TITLE	
STANDARD POSITIONS	
DRAWN BY	DATE
C.LARKIN	02/04/2024
CUSTOMER	CUSTOMER

**NOTE:**  
All tanks must be fully supported on a flat, level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

DESCRIPTION:

PW90.INS.AB6

ALL DIMENSIONS IN MM - DO NOT SCALE

NOTES	
DATE	13/03/2023
FIRST ISSUE	xxx
VERSION	xxx

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	610 x 305 x 510mm
EXTERNAL DIMENSIONS	790 x 500 x 820mm
NOMINAL CAPACITY	90 Litres
INSULATION THICKNESS	25mm
STEEL BRACINGS	NONE
ENCAPSULATED BASEBOARD	NONE
TANK COLOUR	GREY - 00A05



SCALE:1:13

SHEET 1 OF 1