
## Notes:

- Pumpwell delivered with pumps installed. Control panel and Float switch attached to pallet.
  Pumps to be coupled to chains with shackles supplied on lifting chain which is connected to the unistrut assembly.
  Read Operating and Installation guidelines before installing.

		Case Depth 'B'			Inlet Invert 'A'			
Case Ø	Outlet Invert	PX2	РХ3	PX4	05	11	14	Inlet Size
	'C'	<b>10</b> (1.0m)	<b>16</b> (1.6m)	<b>19</b> (1.9m)	0.5m	1.1m	1.4m	'E'
		•			•			110000
09 (0.9m)	0.5m		•			•		110mm
				•			•	160mm

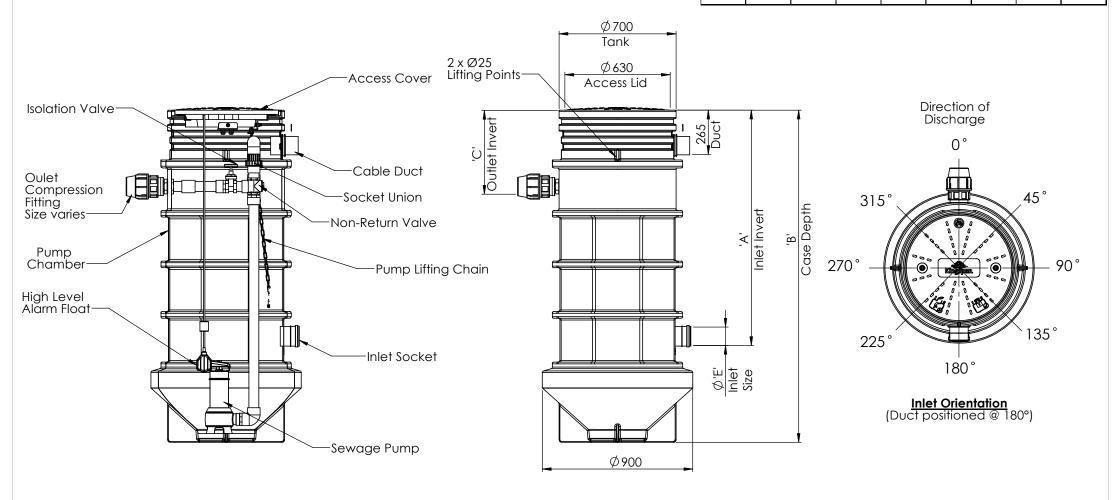

	Please check with Kingspan Water & Energy for the latest Issue of the drawing						
Issue	Date	Drawn By	Approved By	Description			
03	14/11/2024	D.Musvaburi	D.M	ECN 2147			
02	09/10/2024	D.Musvaburi	D.M	ECN 2128			

Scale: Do Not Scale

All Dimensions In mm

A:\Wastewater\Engineering\Drawing Data\02 - Sales Drawings\DS\DS - 14\DS1489P

<b>\rightarrow</b> - \rightarrow -	
Third Angle Projection	

LN Number:

Finish:

Weight

Modelled By :	Material:
Kinaspan Water &	Energy reserve the
	drawing without prior notice.
This drawing is copyright and may	not be reproduced or used without
the written permission of	Kingspan Water & Energy

Thickness

Surface Area: m²

Tolerance (unless stated)

Ø0.9m PE Single Sewage Pump Chamber

Page 1 of 1

Drawing: DS1489P