

AQUABOOST

SP1V-10HM06S-VARiFLO-8

The Aquaboost SP1V-10HM06S-VARiFLO-8 booster set is fully WRAS approved and features a stainless steel multistage pump. The pump is operated by our advanced variable speed controller and will deliver a nominal flow rate of 10.0 m³/h and nominal head pressure of up to 5.4 bar.

WRAS & KIWA Regulation 4 approved




Features


- Flow rates up to 14 m³/h
- Head pressure up to 7.2 Bar
- Variable speed pump control
- WRAS & KIWA Regulation 4 approved
- 304 Stainless Steel (WRAS Approved) Pump
- 304/316 Stainless steel manifold assembly
- 8 litre pressure vessel with flow through isolation & drain valve
- Air cooled inverters
- BMS Volt free contacts
- External Low Water
- Electronic dry run protection
- Base mounting, Suction Fittings, AV mounts & Flexible connectors optional

Applications

- Cold water pressure and flow boosting in a range of domestic, commercial and industrial applications

Product Code Structure

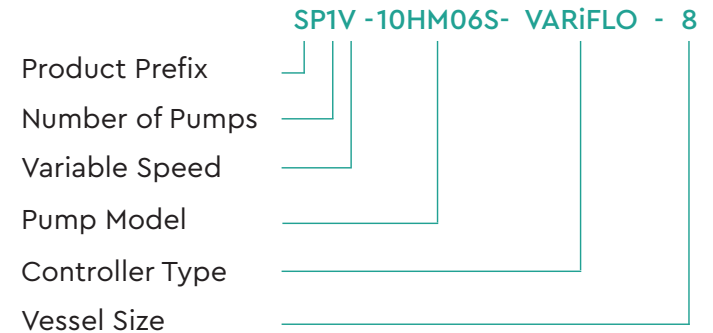

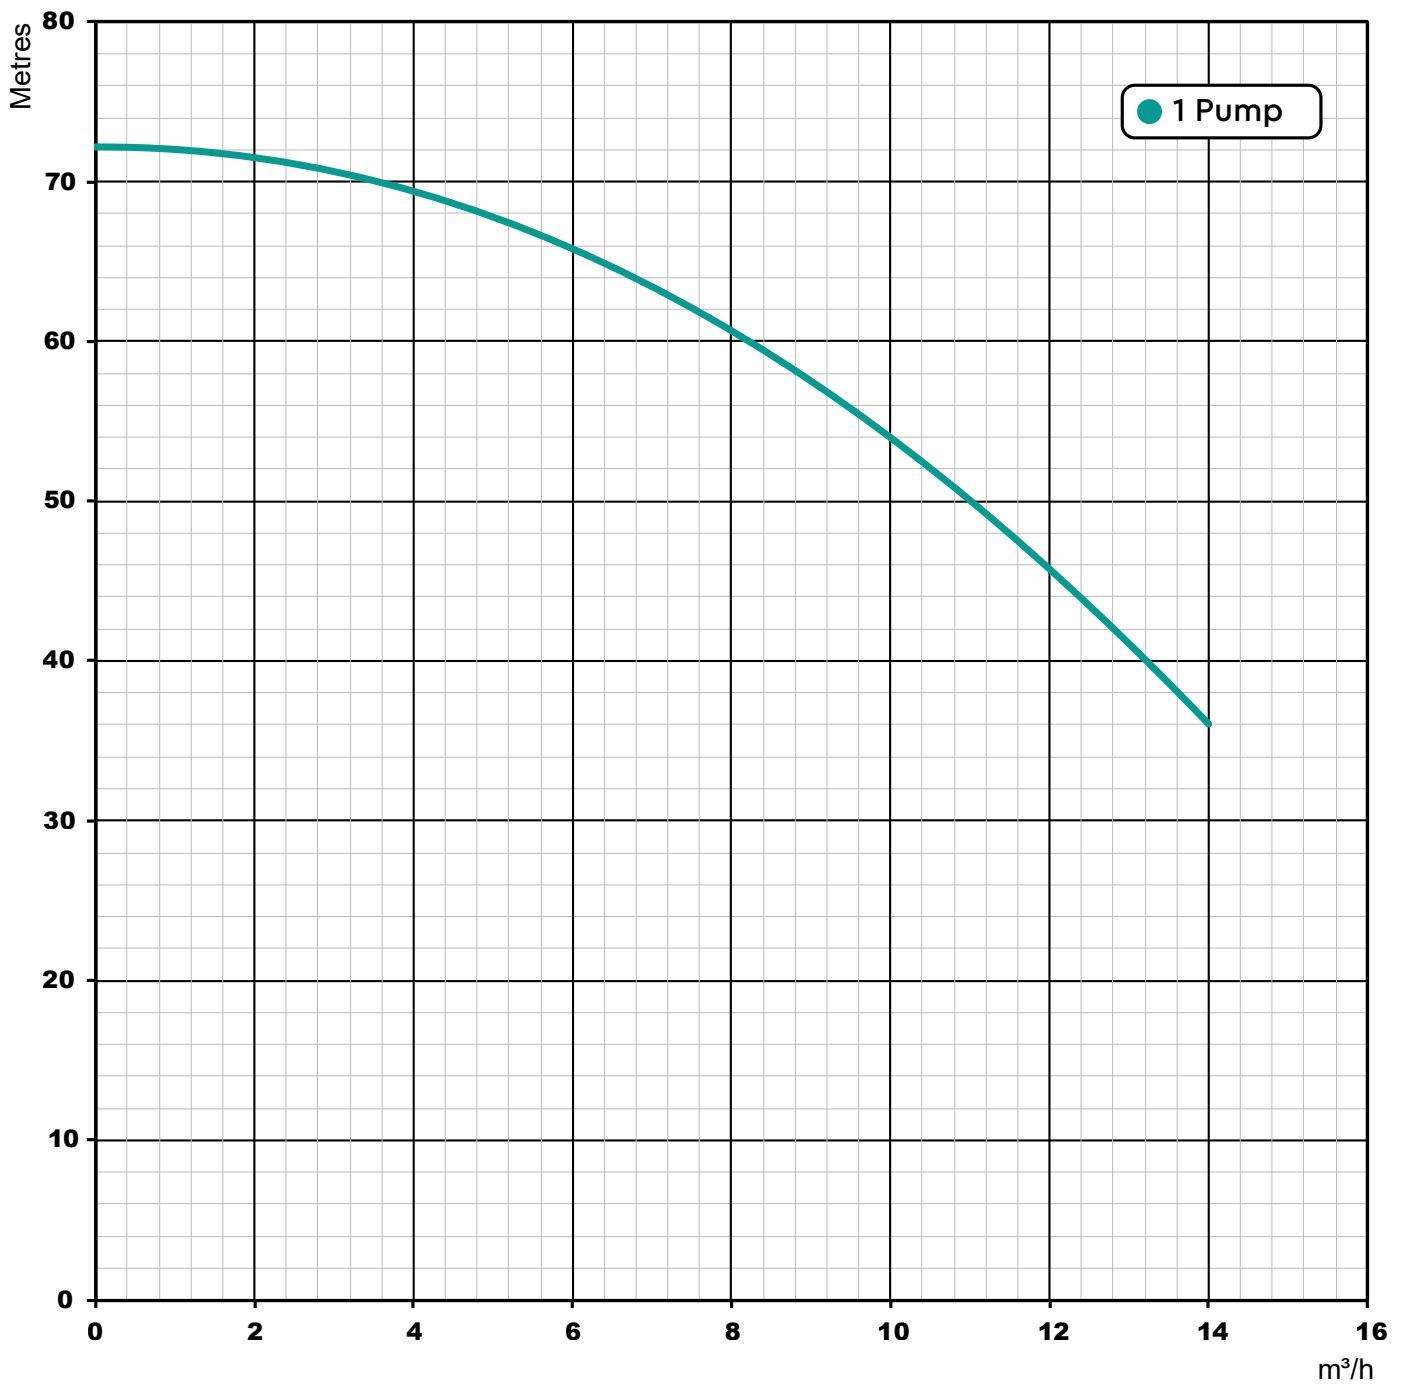Pump Characteristic SP1V-10HM06S-VARiFLO-8

Aquaboost Model		SP1V-10HM06S-VARiFLO-8 62019
General	Warranty	2 Years
	WRAS approval	241004717
	KIWA approval	Regulation 4 Approved
	Conformity certification	CE / UKCA
Features	Dry run protection	✓
	Glycerine filled pressure gauge	✓
	Pump check valve(s)	✓
	BMS volt-free contacts	✓
Performance	Nominal head	5.4 bar
	Maximum head (closed valve)	7.2 bar
	Nominal flow rate	10 m ³ /h (per pump)
	Maximum flow rate	14 m ³ /h (per pump)
	Minimum static inlet pressure	1 metre
	Maximum static inlet pressure	10 metres
	Maximum ambient air temperature	Max 40 °C
	Water temperature range	Min 4 °C / Max 23 °C
	Maximum working pressure (kPa / bar)	1000 kPa / 10 bar
Connections	Inlet	1-1/2" BSP
	Outlet	1-1/4" BSP
Manifold	Manifold construction	Stainless steel
	Pump isolation valves	Full bore, lever
Pump	Number of pumps	1
	Pump type	Multistage centrifugal (horizontal)
	Pump body	Stainless steel
	Impeller	Stainless steel
	Mechanical seal	EPDM / Silicon Carbide / Carbon
	Motor type	Induction (current overload sensor)
	Duty rating	Continuous (S1)
Electrical	Power supply / phase / frequency	230 V / 1 / 50Hz
	Power consumption	2.2 kW
	Current - full load	8.6 Amps
Physical	Enclosure protection	IP55
	Width	271 mm
	Depth	595 mm
	Height	825 mm
	Weight	35 kg

